




Recommended Accessories

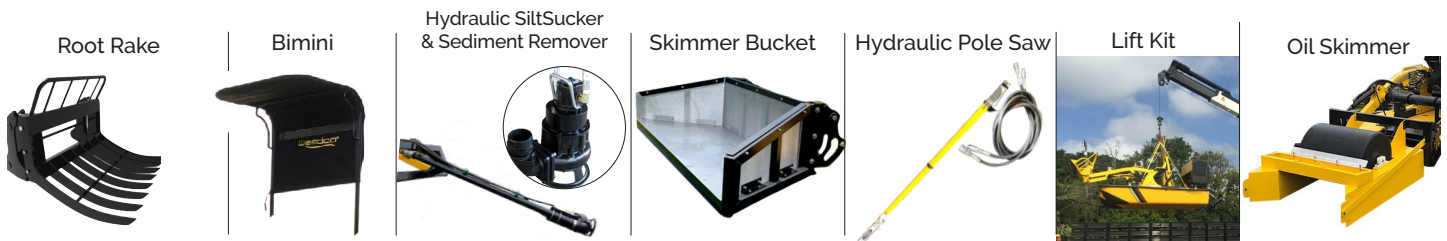

MORE POWER. MORE PROPULSION.

Compact Size—Easy to maneuver around docks

No Ramp Needed—Boat goes from trailer to water

8-inch Shallow Draft—Draft gets you where the weeds are

Powerful Payload—500 lbs. of vegetation a minute or over 100 tons a day, transform an overgrown lake in an afternoon

Versatile Quick-Change Attachments—Handle the toughest jobs in the most extreme conditions

Strength & Stability—Unique hull design for maximum payload and balance

Affordable Financing—Easy financing options available

Warranty, Easy as 1,2,3—1-year external attachments, 2-year (or 2000 hours) Kubota engine, 3-year hull & deck

FACTORY DIRECT—No middle-person markups save time and money

West Palm Beach, Florida

weedooboats.com • 561-204-5765

Nothing Cleans Waterways Better Than Weedoo!



TC-3012 Workboat

SPEC SHEET



WHAT THE HULL!

The TC Series has the stability of harvesters several times their size because of a unique hull design allowing maximum payload and balance. And they're able to accomplish this in an eco-friendly manner that preserves nature.

Fiberglass/Kevlar hull configuration includes deck-mounted marine boom cutter, front-end loader with universal marine bucket system and T-1305 highway transportation trailer. Factory installed PowerPack features diesel engine with electric start. Cyclonic hydraulic system provides eco-friendly fluid to high efficiency triple pump setup producing 27 GPM. System includes twin propulsion outdrives with Weedoo Weed-N-Mud propellers and quick-change hydraulics for aquatic work attachments.

Engine factory installed power platform features Kubota D902-T-E4 3-cylinder liquid cooled, turbo diesel engine (Tier 4 Final) with electric start and alternator.


TC SERIES WORKBOAT

	US	Metric
Height	8 ft	2438 mm
Width	7 ft 3 in	2225 mm
Length	15 ft	4572 mm
Weight	2285 lbs	1030 kg
Boat Draft/drives down	10 in/20 in	254 mm/508 mm
Height from Waterline	46-48 in	1168-1219 mm


TC SERIES WORKBOAT WITH TRAILER

Height	11 ft	3353 mm
Width	8 ft 8 in	2682 mm
Length	22 ft	6706 mm
Weight	3035 lbs	1224 kg

Loader & Bucket Articulation

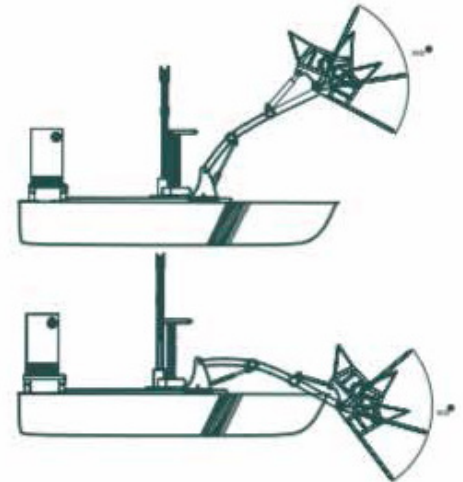

Cutter Articulation

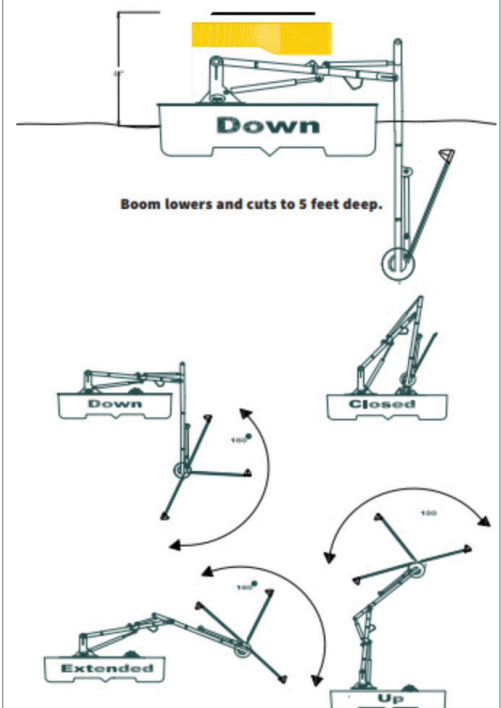

West Palm Beach, Florida

weedooboats.com • 561-204-5765

Nothing Cleans Waterways Better Than Weedoo!



Rev. 1/25