



Recommended Accessories



MORE POWER. MORE PROPULSION.

- Compact Size**—Easy to maneuver around docks
- No Ramp Needed**—Boat goes from trailer to water
- 8-inch Shallow Draft**—Draft gets you where the weeds are
- Powerful Payload**—500 lbs. of vegetation a minute or over 100 tons a day, transform an overgrown lake in an afternoon
- Versatile Quick-Change Attachments**—Handle the toughest jobs in the most extreme conditions
- Strength & Stability**—Unique hull design for maximum payload and balance
- Affordable Financing**—Easy financing options available
- Warranty, Easy as 1,2,3**—1-year external attachments, 2-year (or 2000 hours) Kubota engine, 3-year hull & deck
- FACTORY DIRECT**—No middle-person markups save time and money

1340 SW Commerce Way • Stuart, FL
 weedoboats.com • 561-204-5765

Nothing Cleans Waterways Better Than Weedoo!



TC-3012 Workboat SPEC SHEET





WHAT THE HULL!

The TC Series has the stability of harvesters several times their size because of a unique hull design allowing maximum payload and balance. And they're able to accomplish this in an eco-friendly manner that preserves nature.

Fiberglass/Kevlar hull configuration includes deck-mounted marine boom cutter, front-end loader with universal marine bucket system and T-1305 highway transportation trailer. Factory installed PowerPack features diesel engine with electric start. Cyclonic hydraulic system provides eco-friendly fluid to high efficiency triple pump setup producing 27 GPM. System includes twin propulsion outdrives with Weedoo Weed-N-Mud propellers and quick-change hydraulics for aquatic work attachments.

Engine factory installed power platform features Kubota Dg02-T-E4 3-cylinder liquid cooled, turbo diesel engine (Tier 4 Final) with electric start and alternator.

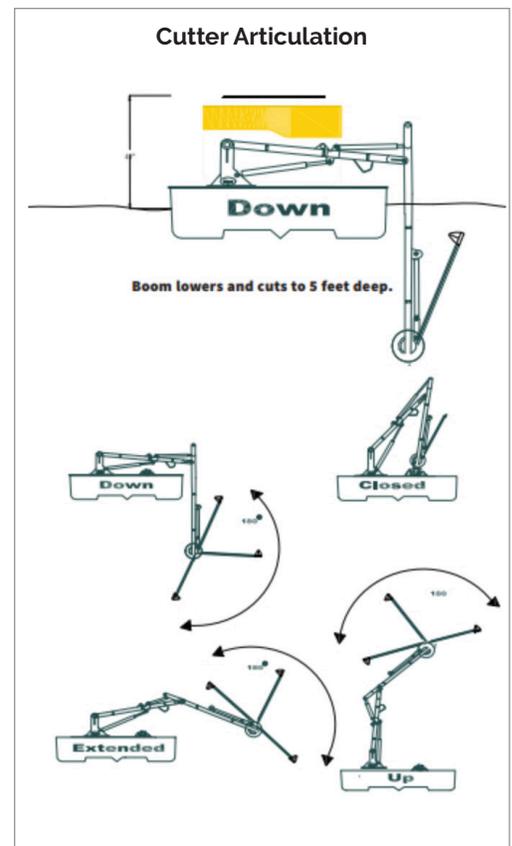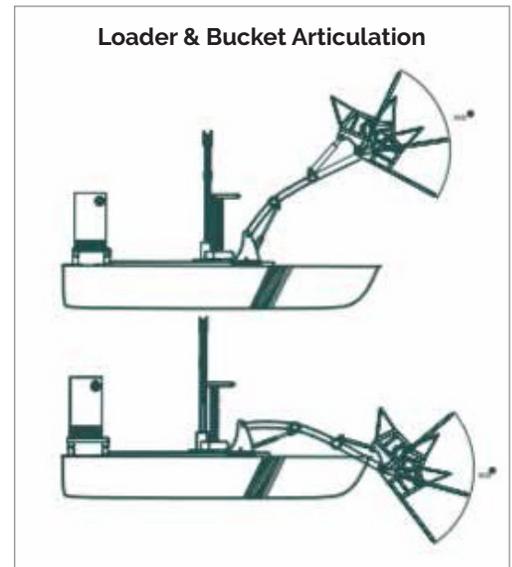

TC SERIES WORKBOAT

	US	Metric
Height	8 ft	2438 mm
Width	7 ft 3 in	2225 mm
Length	15 ft	4572 mm
Weight	2285 lbs	1030 kg
Boat Draft/drives down	10 in/20 in	254 mm/508 mm
Height from Waterline	46-48 in	1168-1219 mm

TC SERIES WORKBOAT WITH TRAILER

Height	11 ft	3353 mm
Width	8 ft 8 in	2682 mm
Length	22 ft	6706 mm
Weight	3035 lbs	1224 kg

1340 SW Commerce Way • Stuart, FL
weedooboats.com • 561-204-5765

Nothing Cleans Waterways Better Than Weedoo!

