



Weedoo®  
workboats

# TC-3014 TURBO

## Recommended Accessories



# POWERFUL, VERSATILE, MANEUVERABLE...and LESS

All the Features of the TC-3012, without the Cutter

- Compact Size**—Easy to maneuver around docks
- No Ramp Needed**—Boat goes from trailer to water
- 8-inch Shallow Draft**—Draft gets you where the weeds are
- Powerful Payload**—500 lbs. of vegetation a minute or over 100 tons a day, transform an overgrown lake in an afternoon
- Versatile Quick-Change Attachments**—Handle the toughest jobs in the most extreme conditions
- Strength & Stability**—Unique hull design for maximum payload and balance
- Affordable Financing**—Easy financing options available
- Warranty, Easy as 1,2,3**—1-year external attachments, 3-year (or 3000 hours) Kubota engine, 3-year hull & deck
- FACTORY DIRECT**—No middle-person markups save time and money

1340 SW Commerce Way • Stuart, FL  
weedoboats.com • 561-204-5765

*Nothing Cleans Waterways Better Than Weedoo!*



# TC-3014 Workboat SPEC SHEET




## WHAT THE HULL!

The TC Series has the stability of harvesters several times their size because of a unique hull design allowing maximum payload and balance. And they're able to accomplish this in an eco-friendly manner that preserves nature.

Fiberglass/Kevlar hull configuration includes front-end loader with universal marine bucket system and T-1305 highway transportation trailer. Factory installed PowerPack features diesel engine with electric start. Cyclonic hydraulic system provides eco-friendly fluid to high efficiency triple pump setup producing 27 GPM. System includes twin propulsion outdrives with Weedoo Weed-N-Mud propellers and quick-change hydraulics for aquatic work attachments.

Engine factory installed power platform features Kubota D902-T-E4 3-cylinder liquid cooled, turbo diesel engine (Tier 4 Final) with electric start and alternator.

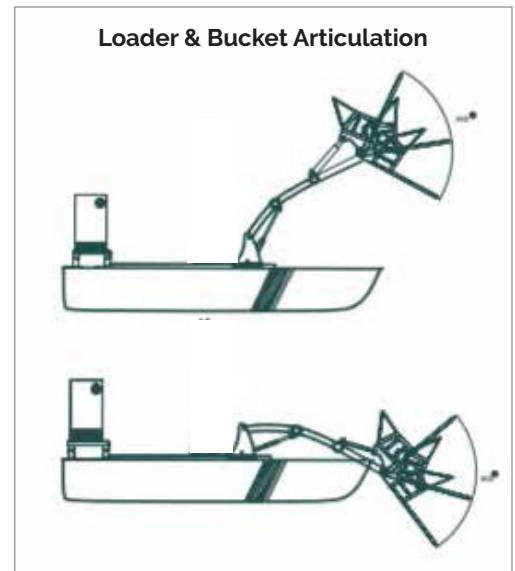

TC SERIES WORKBOAT		
	US	Metric
Height	5 ft	1524 mm
Width	7 ft 3 in	2225 mm
Length	15 ft	4572 mm
Weight	1835 lbs	1030 kg
Boat Draft/drives down	10 in/20 in	254 mm/508 mm
Height from Waterline	46-48 in	1168-1219 mm

TC SERIES WORKBOAT WITH TRAILER		
Height	7 ft	2134 mm
Width	8 ft 8 in	2682 mm
Length	22 ft	6706 mm
Weight	2585 lbs	1224 kg



1340 SW Commerce Way • Stuart, FL  
weedoboats.com • 561-204-5765

*Nothing Cleans Waterways Better Than Weedoo!*

