


Recommended Accessories


Root Rake



Skimmer Bucket



Grapple™



Hydraulic SiltSucker & Sediment Remover



Bimini



Hydraulic Pole Saw



Lift Kit



POWERFUL, VERSATILE, MANEUVERABLE...and LESS

All the Features of the TC-3012, without the Cutter

Compact Size—Easy to maneuver around docks

No Ramp Needed—Boat goes from trailer to water

8-inch Shallow Draft—Draft gets you where the weeds are

Powerful Payload—500 lbs. of vegetation a minute or over 100 tons a day, transform an overgrown lake in an afternoon

Versatile Quick-Change Attachments—Handle the toughest jobs in the most extreme conditions

Strength & Stability—Unique hull design for maximum payload and balance

Affordable Financing—Easy financing options available

Warranty—1-year external attachments, 3-year (or 3000 hours) Kubota engine, 3-year hull & deck

FACTORY DIRECT—No middle-person markups save time and money

1340 SW Commerce Way • Stuart, FL

weedooboats.com • 561-204-5765

Nothing Cleans Waterways Better Than Weedoo!

ISO 9001:2015 CERTIFIED COMPANY
PRI Registrar
PERFORMANCE REVIEW INSTITUTE

GSA Contract Holder
Contract # 47QMCA20D0042

Rev. 10/26

TC-3014 Workboat

SPEC SHEET


WHAT THE HULL!

The TC Series has the stability of harvesters several times their size because of a unique hull design allowing maximum payload and balance. And they're able to accomplish this in an eco-friendly manner that preserves nature.

Fiberglass/Kevlar hull configuration includes front-end loader with universal marine bucket system and T-1305 highway transportation trailer. Factory installed PowerPack features diesel engine with electric start. Cyclonic hydraulic system provides eco-friendly fluid to high efficiency triple pump setup producing 27 GPM. System includes twin propulsion outdrives with Weedoo Weed-N-Mud propellers and quick-change hydraulics for aquatic work attachments.

Engine factory installed power platform features Kubota D902-T-E4 3-cylinder liquid cooled, turbo diesel engine (Tier 4 Final) with electric start and alternator.

Loader & Bucket Articulation

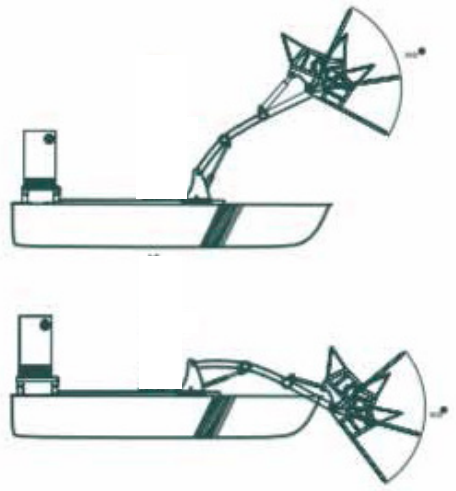

TC SERIES WORKBOAT	US	Metric
Height	5 ft	1524 mm
Width	7 ft 3 in	2225 mm
Length	15 ft	4572 mm
Weight	1835 lbs	832 kg
Boat Draft/drives down	10 in/20 in	254 mm/508 mm
Height from Waterline	46-48 in	1168-1219 mm

TC SERIES WORKBOAT WITH TRAILER		
Height	7 ft	2134 mm
Width	8 ft 8 in	2682 mm
Length	22 ft	6706 mm
Weight	2585 lbs	1171 kg



1340 SW Commerce Way • Stuart, FL

weedooboats.com • 561-204-5765

Nothing Cleans Waterways Better Than Weedoo!

ISO 9001:2015 CERTIFIED COMPANY

GSA Contract Holder Contract # 47QMCA20D0042

Rev. 10/26